


### SALIENT FEATURES :

- Screwed Female ends to IS 554/ BS 21/ ISO 7.
- Full bore, Two piece design.
- Quarter turn, Lever operated.
- Provided with Forged Brass hard Chrome plated ball.
- PTFE body rings & gland packing.
- Chrome plated finish.


Art. No.  
**1008B**

### ZOLOTO® FORGED BRASS BALL VALVE (Screwed)

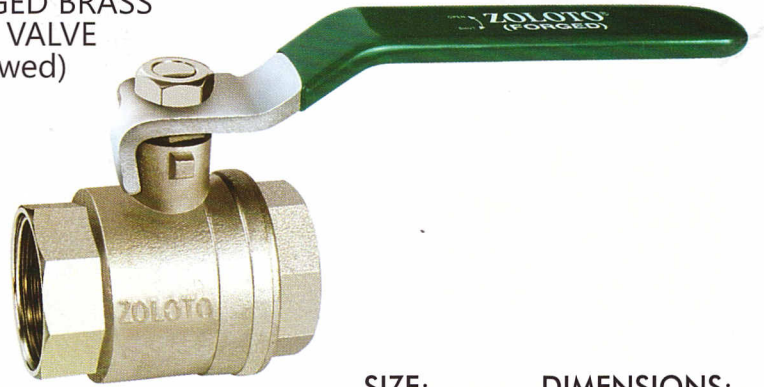

#### SUITABLE FOR

Steam	Water	Oil	Air	Gases
	◆	◆		

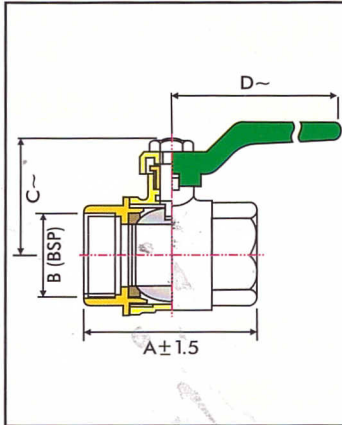

#### MATERIALS :

Name of Part	Material	Specification
Stem	Forged Brass	IS 6912 Gr. FLB
Nut	Carbon Steel	IS 1367
Washer	Carbon Steel	IS 1367
Lever	Carbon Steel	IS 2062
Body & Gland Nut	Forged Brass	IS 6912 Gr. FLB
Gland Packing	PTFE	BS EN 12086-1
Ball	Forged Brass	IS 6912 Gr. FLB
Body Seat Ring	PTFE	BS EN 12086-1
Bonnet	Forged Brass	IS 6912 Gr. FLB

#### SIZE:

#### DIMENSIONS:

Inches	mm	A	B	C	D
1/4	8	47	1/4"	37	90
3/8	10	47	3/8"	37	90
1/2	15	50	1/2"	40	90
3/4	20	58	3/4"	43	120
1	25	67	1"	51	120
1 1/4	32	76	1 1/4"	65	154
1 1/2	40	87	1 1/2"	72	154
2	50	104	2"	80	170
2 1/2	65	139	2 1/2"	102	250

Test Pressure (Hydraulic) Shell : 25kg/cm<sup>2</sup>g (350psig) Seat : 16kg/cm<sup>2</sup>g (225psig)

### SALIENT FEATURES :

- Screwed Female ends to IS 554/ BS 21/ ISO 7.
- Single piece design, Integral seat.
- Meant for vertical lines only.
- Permits flow in one direction and shuts automatically if the flow reverses.
- Spring loaded and 'O' ring type.
- Also available with metal to metal seating.


Art. No.  
**1009**

### ZOLOTO® BRONZE VERTICAL CHECK VALVE (Screwed)



#### SUITABLE FOR

Steam	Water	Oil	Air	Gases
	◆	◆		

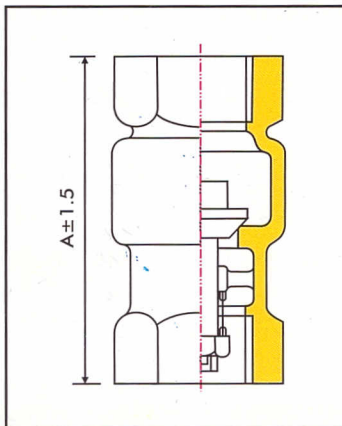

#### MATERIALS :

Name of Part	Material	Specification
Body	Bronze	IS 318 Gr. LTB 2
Disc	Bronze	IS 318 Gr. LTB 2
Nut	Brass	IS 319 Gr. 2 (Half Hard)
Spring	Stainless Steel	AISI 304
Split Pin	Phosphorus Bronze	IS 7608
'O' Ring	Nitrile Rubber	IS 5192-1

#### SIZE:

#### DIMENSIONS:

Inches	mm	A
1/2	15	55
3/4	20	66
1	25	76
1 1/4	32	80
1 1/2	40	85
2	50	93
2 1/2	65	114
3	80	118
4	100	141

Test Pressure (Hydraulic) Shell : 25kg/cm<sup>2</sup>g (350psig) Seat : 16kg/cm<sup>2</sup>g (225psig)